


### Mounting the cover

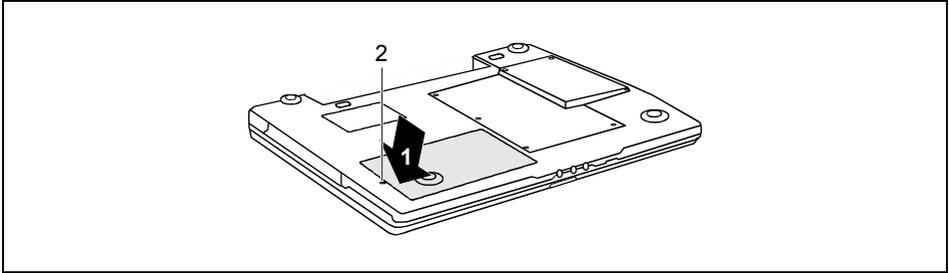


- ▶ Place the cover on its mounting location (1).
- ▶ Fasten the cover with the screw (2).
- ▶ Replace the battery (see "Inserting battery").
- ▶ Turn the notebook over and place it on a flat surface.
- ▶ Reconnect the cables that you disconnected before.

## Removing and installing optical drive

If you are asked by the Hotline/Help Desk to remove and install the optical drive yourself, proceed as follows:


### Removing optical drive

- ▶ Switch the notebook off and pull the power plug out of the mains socket.
- ▶ Close the LCD screen so that it locks into place.
- ▶ Disconnect all cables connected to the notebook.
- ▶ Turn your notebook over and place it on a sturdy, flat surface.
- ▶ Remove the battery (see "Removing battery").

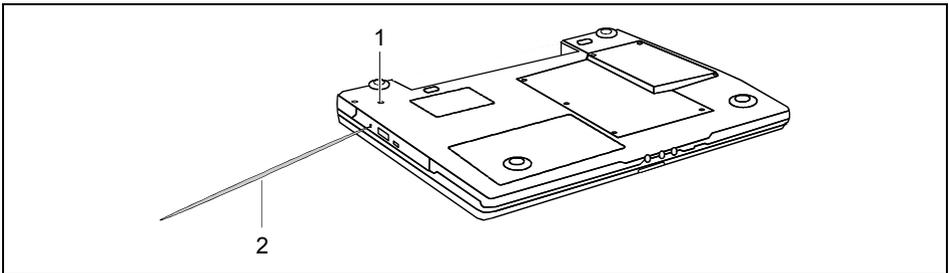


- ▶ Remove the screw (1).
- ▶ Firmly press a metal pin or wire (e.g. paperclip) into the opening (2).

The drive tray is ejected. You can now pull out the drive tray completely.

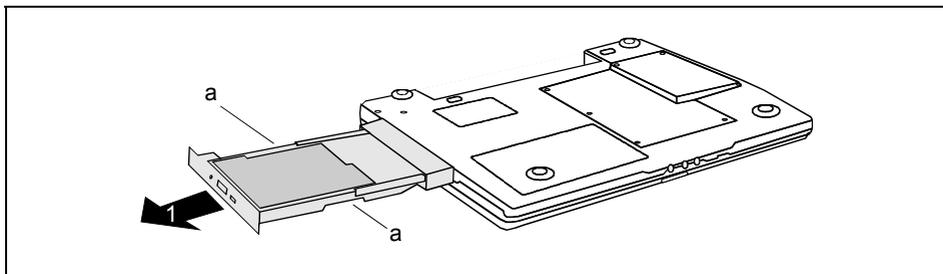

- ▶ Handle the drive tray in the position illustrated (a) and pull the optical drive carefully out of the notebook in the direction of the arrow (1).
- ▶ Push in the drive tray until you feel it lock into place.

### Installing optical drive

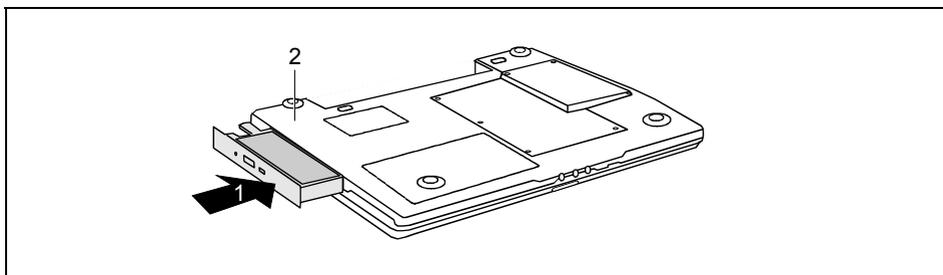

- ▶ Slide the optical drive into the notebook in the direction of the arrow (1).
- ▶ Fasten the screw (2).
- ▶ Replace the battery (see "Inserting battery").
- ▶ Turn the notebook over and place it on a flat surface.
- ▶ Reconnect the cables that you disconnected before.